


Voice Demo Board

HT68RV032/033/034/035

Characteristics

- Voice OTP MCU, one-time programming used for voice data update
- Delta Sigma PWM output to ensure excellent voice effect
- Voice sampling rate is up to 48kHz to maintain voice characteristics without resampling
- Supports peripheral mode: 1/2-wire, 3-wire SPI, I²C, direct mode (6-key) control
- Voice length (6kHz/APDCM4):
HT68RV032/033/034/035=85s/170s/340s/680s

Block Diagram

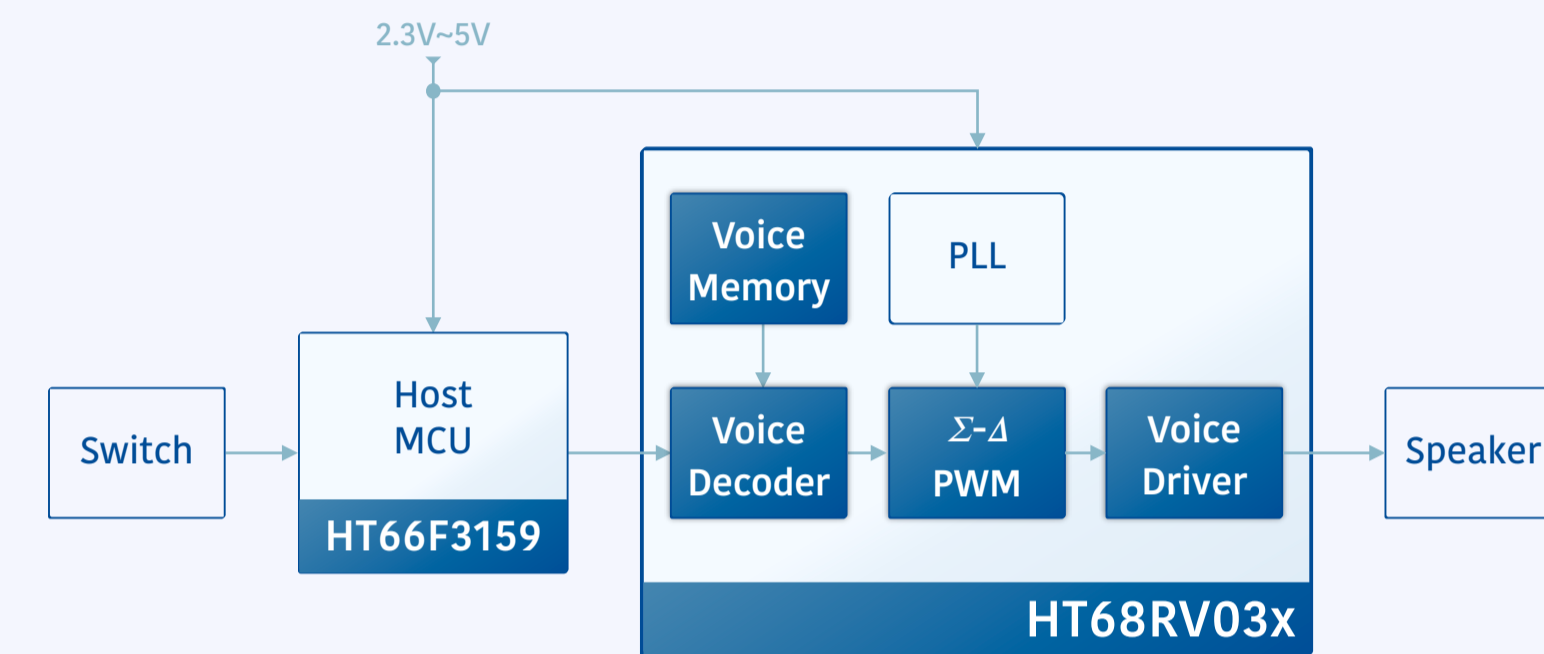

Applications

Blood pressure meters, blood glucose meters, door locks, etc.

